




Thank you for purchasing the de Lisle 8x8 Amp-Speaker Selector! Please read this manual before using it.

WARNINGS:

- This device is not designed to be switched under signal conditions.
- Protective loads are included as a precaution. Unused amps should be powered off or on standby.
- Do not connect amplifier outputs to the "Speakers" jacks or speakers to the "Amplifiers" jacks.
- This device was designed for tube amplifiers and may not be compatible with modelers or solid state amps.


CONNECTIONS:

The rear panel includes sixteen 1/4" mono jacks. Use the eight "Speaker" jacks to connect to your speaker cabinets. Connect each amplifier's speaker output to one of the "Amplifier" jacks. Routing occurs on the speaker side, so the all amplifier outputs are isolated from one another. Do not reverse these connections or you could damage your gear.

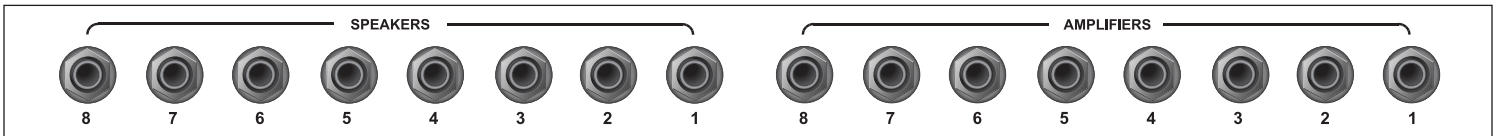

SWITCHING:

The eight "Speaker" switches on the front panel route the corresponding speaker jack to an amplifier. For example, if the "Speaker 1" knob is set to the "2" position, the cabinet connected to speaker jack "1" would be routed to the amp connected to the amplifier "2" jack. If two cabinets are set to the same amplifier, they will be connected in parallel. Set the knob to the "0" position if you do not want to connect that particular cabinet.

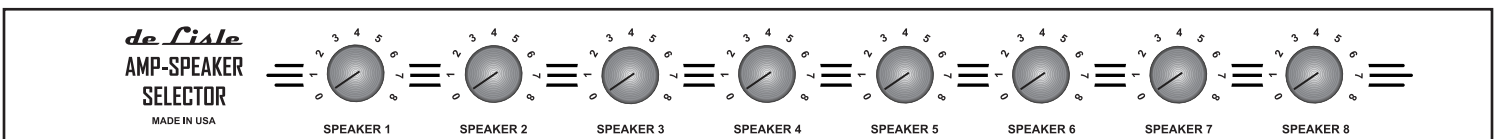

Pick up our ABC pedal for easier switching on the front end!
<http://www.delisleguitar.com/index.php/pedals#ABC>