




Thank you for purchasing the de Lisle Amp-Speaker Selector V3! Please read this manual before using it.

### WARNINGS:


- This device is not designed to be switched under signal conditions.
- Protective loads are included as a precaution. Unused amps should be powered off or on standby.
- Do not connect amplifier outputs to the "Speakers" jacks or speakers to the "Amplifiers" jacks.

### CONNECTIONS:

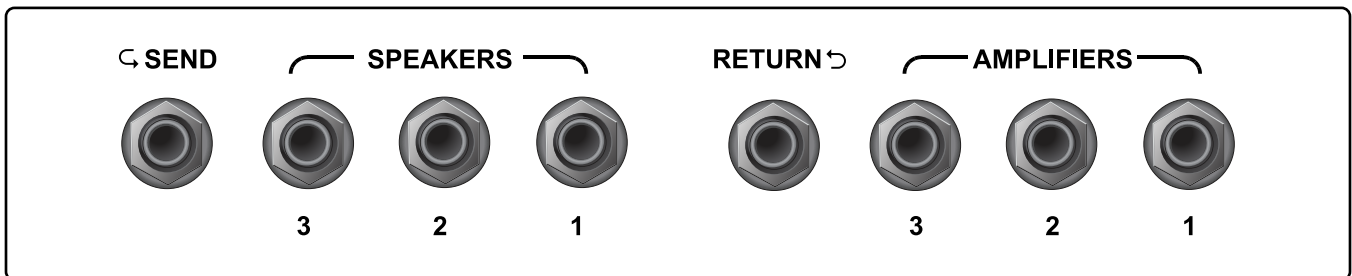

- SPEAKER 1-3** Connect to your speaker cabinets.
- AMPLIFIER 1-3** Connect to your amplifiers' output jacks.
- SEND** Connect to your attenuator's input ("From Amp") jack.
- RETURN** Connect to your attenuator's output ("To Speaker") jack.

### SWITCHING:

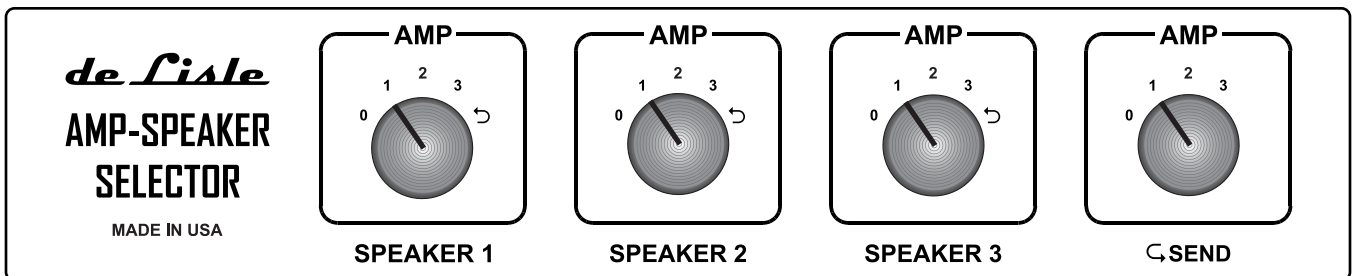

The four switches on the front panel route the corresponding speaker to the selected amplifier. For example, if the "Speaker 1" knob is set to the "2" position, the cabinet connected to the "Speaker 1" jack on the rear panel will be routed to the amplifier connected to the "Amplifier 2" jack. If two cabinets are routed to the same amplifier, they will be connected in parallel. Set the knob to the "0" position if you do not want to connect that particular cabinet to an amplifier.

To use an amp through the attenuator loop, set the "Send" knob to any 1-3 position. This will route the corresponding amp's output to the input of the attenuator. Set one or more of the Speaker knobs to the return symbol (↶). This will route the attenuator's output to the corresponding cabinet(s).

**Pick up our ABC pedal for easier switching on the front end!**

<https://www.delisleguitar.com/shop/de-lisle-abc-isolated-amp-selector-switch/>